



NH1XL FUSE BASE WITHOUT ACCESORIES	43414111020
NH1XL FUSE BASE WITH SEPARATOR AND BARRIER SCREEN	43414111023
NH1XL FUSE BASE WITH COVERS	43414111025
NH1XL FUSE BASE WITH COVERS, SEPARATOR AND BARRIER SCREEN	43414111027



ELECTRICAL CHARACTERISTICS

Rated Operational Voltage AC	1200V AC	
Rated operational current	250 A	
Rated Operational Voltage DC	1100V DC	1500V DC
Rated operational current	250 A	200 A
Utilization category	DC 20B	
Power loss per fuse –link at reduced current (0.8 Ie)	31 W	

MECHANICAL CHARACTERISTICS

Size	NH1XL
Connection bolts	M10 X 30
Connection torque	32 N/m
Cable lug without covers (S/DIN 46235)	25-300 mm ²
Cable lug protected with covers (S/DIN 46235)	25-240 mm ²
Weight	480 grs
Protection degree with covers (Frontal operated switchgear fitted)	IP-20

DIMENSIONS 43414111020

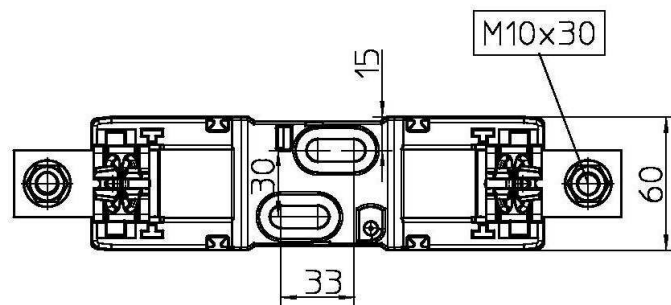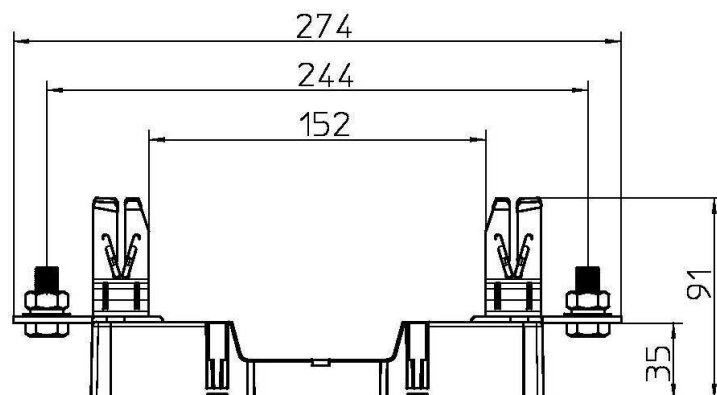

DIMENSIONS 43414111027

